



# Rear Bumper

## Part: JL02T



Fit: 2018 - Current

Jeep Wrangler JL



TO AVOID BEING SCRATCHED, PLEASE PROTECT THE SURFACE OF THE TAILGATE VENT COVER CAREFULLY.



REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT.




READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.



PLEASE USE SAFETY GLASSES & ENSURE TO BLOCK VEHICLE MOVEMENT DURING INSTALLATION PROCESS



60-180 min



Cutting Not Required



Drilling Not Required



support@trailfx.com



1 866 638 4870



POLISHED STAINLESS STEEL – LIMITED LIFETIME  
POWDER COATED BLACK – 3 YEARS

### PARTS LIST

Qty	Part Description	Qty	Part Description
4	M12x110 Hex Bolts	1	M12x35 Hex Bolts
9	M12x37x3 Flat Washer	5	M14x35 Hex Bolts
5	M12 Spring Washer	5	M14x37x3 Flat Washer
4	M12 Hex Nuts	5	M14 Spring Washer




### INSTRUCTION PROCEDURE

1. Remove the factory bumper. Raise the TrailFX bumper up into place and align the (4) holes on the frame with the holes on the hitch plate on the bumper.
2. Install the M12x110mm" hex bolts to secure the hitch plate to the rear frame. Should be kept loose at this time.
3. Install the C type connecting plate on the passenger side with M12X35mm" hex bolts. Level the bumper and torque the bolts.
4. Install the M14 bolts and hardware to secure the rear bumper to the vehicle. The mounting positions have been shown in picture.

- 5. Level the bumper and torque the bolts.
- 6. Once proper alignment is achieved, tighten all bolts. Your installation for rear bumper now is complete.

**Install Rear Bumper**

- M12x110x4 Hex Bolts
- M12x37x3x8 Flat Washers
- M12 x4 Spring Washers
- M12 x4 Hex Nuts

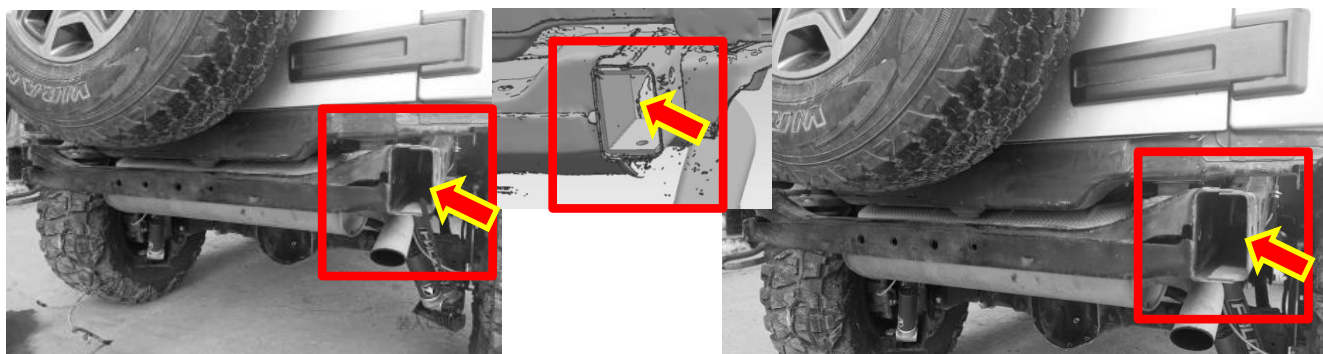

**Install C type connecting plate in passenger side**

- M12x35x1 Bolts
- M12x37x3x1 Flat Washer
- M12x1 Spring Washer

**Install the M14 bolts and hardware to secure the rear bumper to the vehicle.**  
The mounting positions have been shown in picture.

- M14x35 x5 bolts
- M14x37x3 x 5Flat washers
- M14x5 spring Washers



- 7. Once proper alignment is achieved, tighten all bolts.

**PRODUCT CARE**

1. Periodically check the product to ensure all fasteners are tight and components are intact.
2. Regular waxing is recommended to protect the finish of the product.
3. **Use ONLY Non-Abrasive automotive wax.** Use of any soap, polish or wax that contains an abrasive is detrimental and can scratch the finish leading to corrosion.
4. Aluminum polish may be used to polish small scratches and scuffs for **Stainless Steel finish.**
5. Mild soap may be used to clean the product for both **Stainless Steel and Black finish.**

**FAQ's****1. Mounting bracket are not getting installed properly.**

*In some cases illustration images shown in Installation manual may not be the exactly same as per actual vehicle images ,also if Driver / Passenger side mounting brackets are very identical in the design, suggest referring Parts Identification guide to avoid fitment issue.*

**2. Products are thumping / rattling after installation.**

*Please ensure that all required mounting brackets / hardware's are installed & tighten correctly. Suggest using white lithium / regular grease between the metal to metal contact surfaces.*

**3. Missing / Excess Hardware.**

*Recheck hardware count as per the part list.*

**4. Product not installing properly.**

*Ensure make model year, cab length and bed size of your vehicle is listed in the application. All installation steps are followed correctly.*

Check out these other TrailFX Products!!

www.TrailFX.com



Keystone Automotive Operations Inc. (KAO) warrants this product to be free of defects in material and workmanship at the time of purchase by the original retail consumer. KAO disclaims any other warranties, express or implied, including the warranty of fitness for a particular purpose or an intended use. If the product is found to be defective, KAO may replace or repair the product at our option, when the product is returned prepaid, with proof of purchase. Alteration to, improper installation, or misuse of this product voids the warranty. KAO's liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for any incidental or consequential loss or damage.